

# MPS15


## Presentation:

The MPS series is a speaker range of high efficiency, ultra-compact 2-way arrayable point source enclosures designed as to combine the versatility of a point source with the perfect "arrayability" of a line array.

The MPS15 consists of a trapezoidal enclosure housing a high excursion 12" reflex-loaded low frequency woofer that combines excellent linearity, good efficiency and high power handling. The HF section consists of one large format 1.4" neodymium compression driver mounted on a rotatable constant coverage composite horn which provides a 90° H by 60° V dispersion pattern to obtain a smooth frequency response maintaining constant coverage and directivity pattern.

As a Modular Point Source, the MPS15 can be installed as a single element or as part of an array of up to four elements and unlike modular line arrays, the cabinets are designed to connect directly to one another, with splay angle between adjacent cabinets adjustable in increments of 5° and a highly flexible and simple rigging system.

A comprehensive set of accessories is available for creating horizontal or vertical arrays. In sum, the MPS15 is a compact high performance system, the perfect choice for applications that need: higher acoustic levels (SPL), more headroom, wide covered area (but don't need to throw a long distance), more dispersion options becoming a nice compromise between the flexibility of a modular line array but with far simpler rigging and electronic optimization.

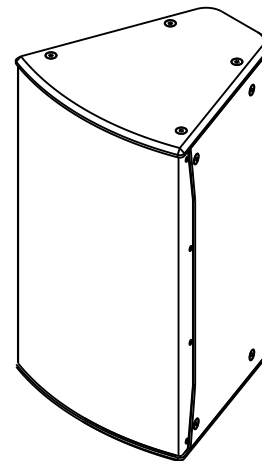

## Features:

- Modular Point Source Element
- Ultra Compact, high-efficiency and elegant Trapezoidal enclosure
- 15" neodymium MF (3in VC) high excursion EU transducer
- 1.4" neodymium HF (2.56in VC) EU compression driver
- 2x NL4 parallel-connected
- User-rotatable CD horn 90°x60° for ideal dispersion
- M10 rigging points for vertical and horizontal installation
- Rugged and durable 15mm birch plywood
- Suited for FOH, Out-fill, In-fill, Worship spaces
- Expandable with subs for a powerful front PA


## Technical specifications:

### Acoustical

Type	2-Way Modular Point Source speaker
Enclosure design	Bass reflex, trapezoidal
Power rating	600W / 850W / 2200W (RMS/Program/Peak)
Frequency range	49 - 19kHz (-10dB)
Nominal impedance	8 ohm
Transducer type	15" Neodymium MF (3in VC) EU transducer 1.4" Neodymium HF (2.56in VC) EU transducer
Dispersion	CD horn, 90°x60° and 60°x90° user-rotatable
Crossover frequency	Preset dependent
	Bi-amp operation (user-selectable)
SPL (1W/1kHz)	133dB @ 1m
Connector	2x NL4 parallel-connected

### Mechanical

Enclosure	15mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	8x M10 flying points, Horizontal flybar, FH-MPS15 Horizontal coupling bar, BH-MPS15 Vertical flybar, FV-MPS15
Dimensions	435x420x710mm   1713x1654x2795in
Weight	26Kg   57.32lb

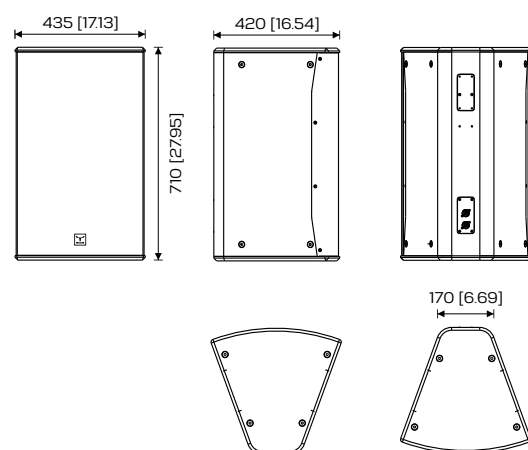

Dimensions in mm [in]