
MPS15

The MPS15 consists of a trapezoidal enclosure housing a high excursion 12" reflexloaded low frequency woofer that combines excellent linearity, good efficiency and high power handling. The HF section consists of one large format 1.4″neodymium compression driver mounted on a rotatable constant coverage composite horn which provides a 90° H by 60° V dispersion pattern to obtain a smooth frequency response maintaining constant coverage and directivity pattern.




Cena:
Kategorie: Audio, Scena, Głośniki, Instalacje AV, Nagłośnienie obiektów

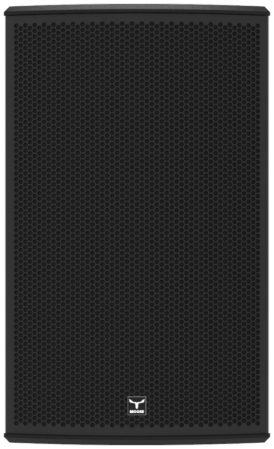

GALLERY IMAGES











OPIS

Key Features

- Modular Point Source Element
- Ultra Compact, high-efficiency and elegant trapezoidal enclosure
- 15” MF (3in VC) high excursion EU transducer
- 1.4” HF (2.56in VC) neodymium EU compression driver
- 2x NL4 parallel-connected
- Bi-amp operation, user-selectable
- User-rotatable CD horn 90°x60° for ideal dispersion
- M10 rigging points for vertical and horizontal installation
- Rugged and durable 15mm birch plywood
- Up to 4 modules can be set up for both Vertical or Horizontal clusters
- Suited for FOH, Out-fill, In-fill, Worship spaces
- Expandable with subs for a powerful front PA

TECH SPECS

Type	2-Way modular point source speaker
Enclosure Design	Bass reflex trapezoidal enclosure
Power Output (RMS)	600W (RMS) 850W (Program) 2200W (Peak)
Frequency Range	49Hz - 19kHz (-10dB)
Nominal Impedance	8Ohm
Transducer Type	15" Neodymium MF (3in VC) EU transducer 1.4" Neodymium HF (2.56in VC) EU transducer
Dispersion	CD horn, 90°x60° and 60°x90° User-rotatable
Crossover Frequency	Preset dependent Bi-amp operation, user-selectable
Max. SPL (peak)	133dB @ 1m

Connector	2x NL4 parallel-connected Bi-amp switch
Construction	15mm birch plywood, textured polyurea coating
Grille	Custom perforated metal grille with acoustic foam
Installation / Rigging / Flying	8x M10 flying points Horizontal flybar, FH-MPS15 Horizontal coupling bar, BH-MPS15 Vertical flybar, FV-MPS15
Dimensions (WxDxH)	435x420x710mm 17.13x16.54x27.95in
Weight	26Kg 57.32lb